
265020060G(02) Optional Items










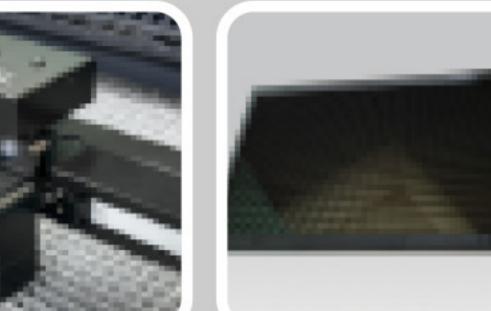



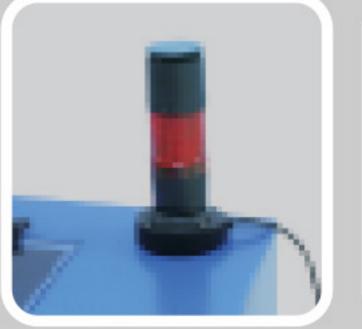



Pass-through Door SmartVISION™

Multiple Table Choices

Rotary Attachment / Rotary Chuck

Fume Extraction

External Signal

SmartGUARD™ Fire Alarm (Patented)

		Choices Offic Rolary Chuck System Indicator Fire Mann (Fatori
		Piolas 400
Work Area	without CCD	1,016 x 610 mm (40 x 24 in.)
with CCD		1,010 x 010 11111 (40 x 24 111.)
Max. Part Size (W x L x H)		1,091 x 680 x 280 mm (43 x 26.8 x 11 in.)
Max. Part Size (W x L x H) (with pass-through door module)		1,064 x ∞ x 165 mm (41.9 x ∞ x 6.5 in.)
Table Size		Standard Alu Grid Cutting Table 1,021 x 614 mm (40.2 x 24.2 in.)
Dimensions (L x W x H)		1,511 x 1,107 x 1,123 mm (59.5 x 43.6 x 44.2 in.)
Weight		392 kg / 864 lb
Laser Source		CO ₂ : 80W, 100W, 120W
Cooling		80W~120W - Air-cooled, Operating environment temperature 15°- 30°C (59°- 86°F)
Drive		Brushless DC motor closed-loop servo control
Camera	SmartEYES	Standard
	Live-view camera	Standard
	SmartVISION Elite	Optional
Max. Engraving Speed		4.44 m/s (175 in/s)
Speed Control		Adjustable from 0.1~100% (Up to 16 color-linked speed settings per job)
Power Control		Adjustable from 0~100% (Up to 16 color-linked power settings per job)
Engraving Capability		256-level gray scale image processing capability
Z-Axis Movement		Automatic
Focus Lens		CO₂: Standard 2.0" (Optional 1.5", 2.5", 3.0" & 4.0")
Resolution (DPI)		Available 125, 250, 300, 380, 500, 600, 760, 1000, 1500
Interface		10 Base-T Ethernet
		USB Type-A 2.0
		– For USB storage (Max. 32GB capacity, FAT file system)
		USB Type-B 2.0 for USB Storage
		📖 – For connecting with the computer
Compatible Operating Systems		MS Windows
Control Panel		7" Touch panel
Safety		Class 1 Laser Product Complies with EN60825-1:2014, EN ISO 13849-1:2023
		Class 2 Laser Product Complies with CDRH for CO2 Laser
		2006/42/EC Machinery Directive Compliance
		Class 4 Laser Product Compliant with CDRH with the optional pass-through door module
Operation Voltage		80Watt and above, 200-240VAC, 50/60HZ Auto Switching, max. 15A
Exhaust Port Diameter		Upper exhaust port diameter: 4" (101mm) / Lower exhaust port diameter: 5" (127mm)
Fume Extraction System		External exhaust system with minimum flow rate 800m3/h (CFM 471 ft³/min) is required, 2.3kPA negative pressure (Pure-Air PA-1500FS @ 4" exhaust port)

^{**} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail.

^{***} Please use certified brands by GCC for LaserPro USB storage, kindly refer to GCC User Manuals for more details.












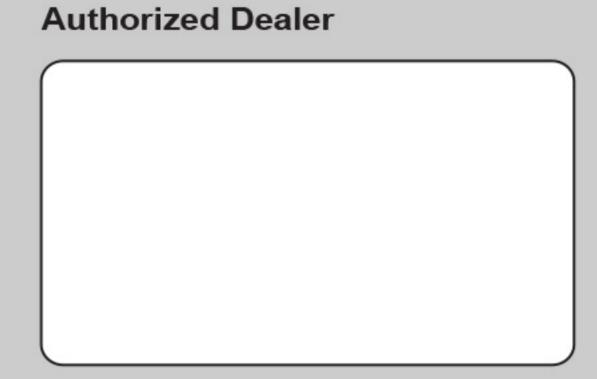

www.GCCworld.com




GCC Headquarters 4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax: 886-2-2694-6875 No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax: 86-512-5726-1518 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367 GCC America, Inc 20453 E Valley Blvd.Walnut, CA 91789, USA

1-909-718-0248 Fax: 1-909-718-0251 US & Canada Only Toll Free: 1-888-284-5211




EXPERIENCE PEAK PERFORMANCE

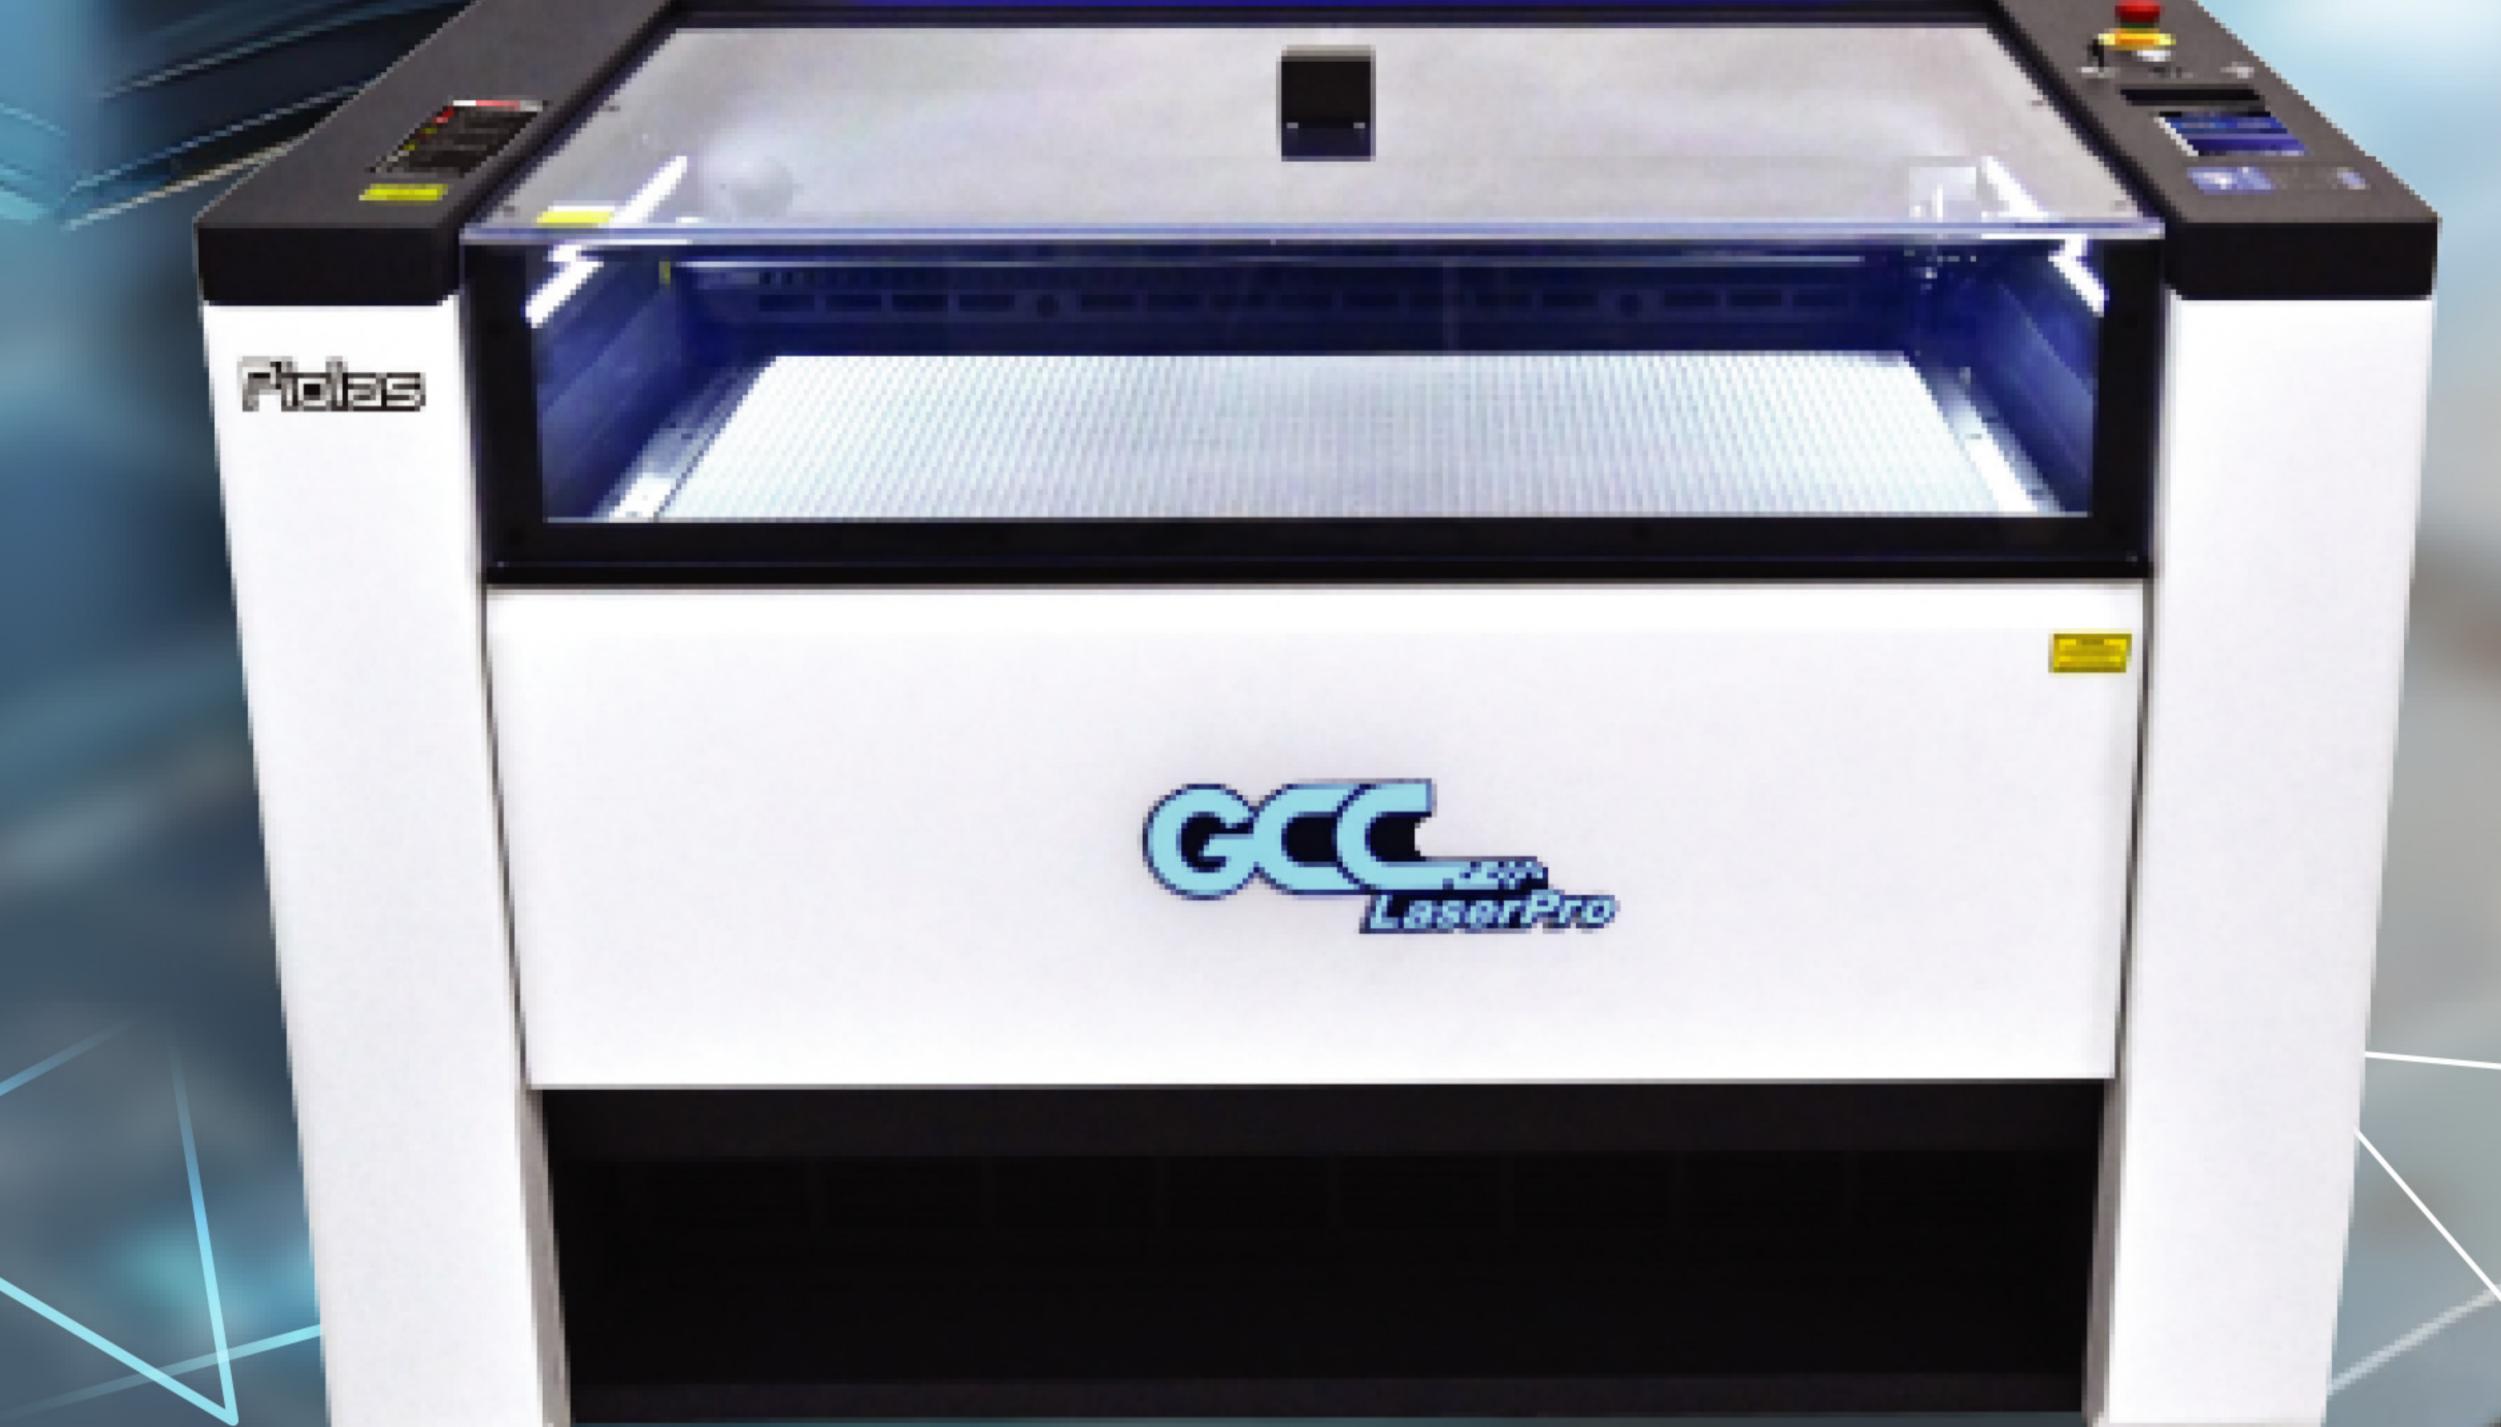

- Unmatched engraving speed of 175 IPS (4,445 mm/sec)
- 40" x 24" (1,016 mm x 610 mm) extra-large working area
- Equipped with SmartEYES™ CCD for effortless positioning
- Standard live-view camera for educational purposes
- Brushless DC motor closed-loop servo control ensures precise and rapid movement of the laser carriage
- Comes with a 7" touchscreen display
- Status indicator lights on the upper cover allow users to easily discern the machine's status
- SmartLID™, an easy-access design that simplifies maintenance

Specifications are subject to change without prior notice.

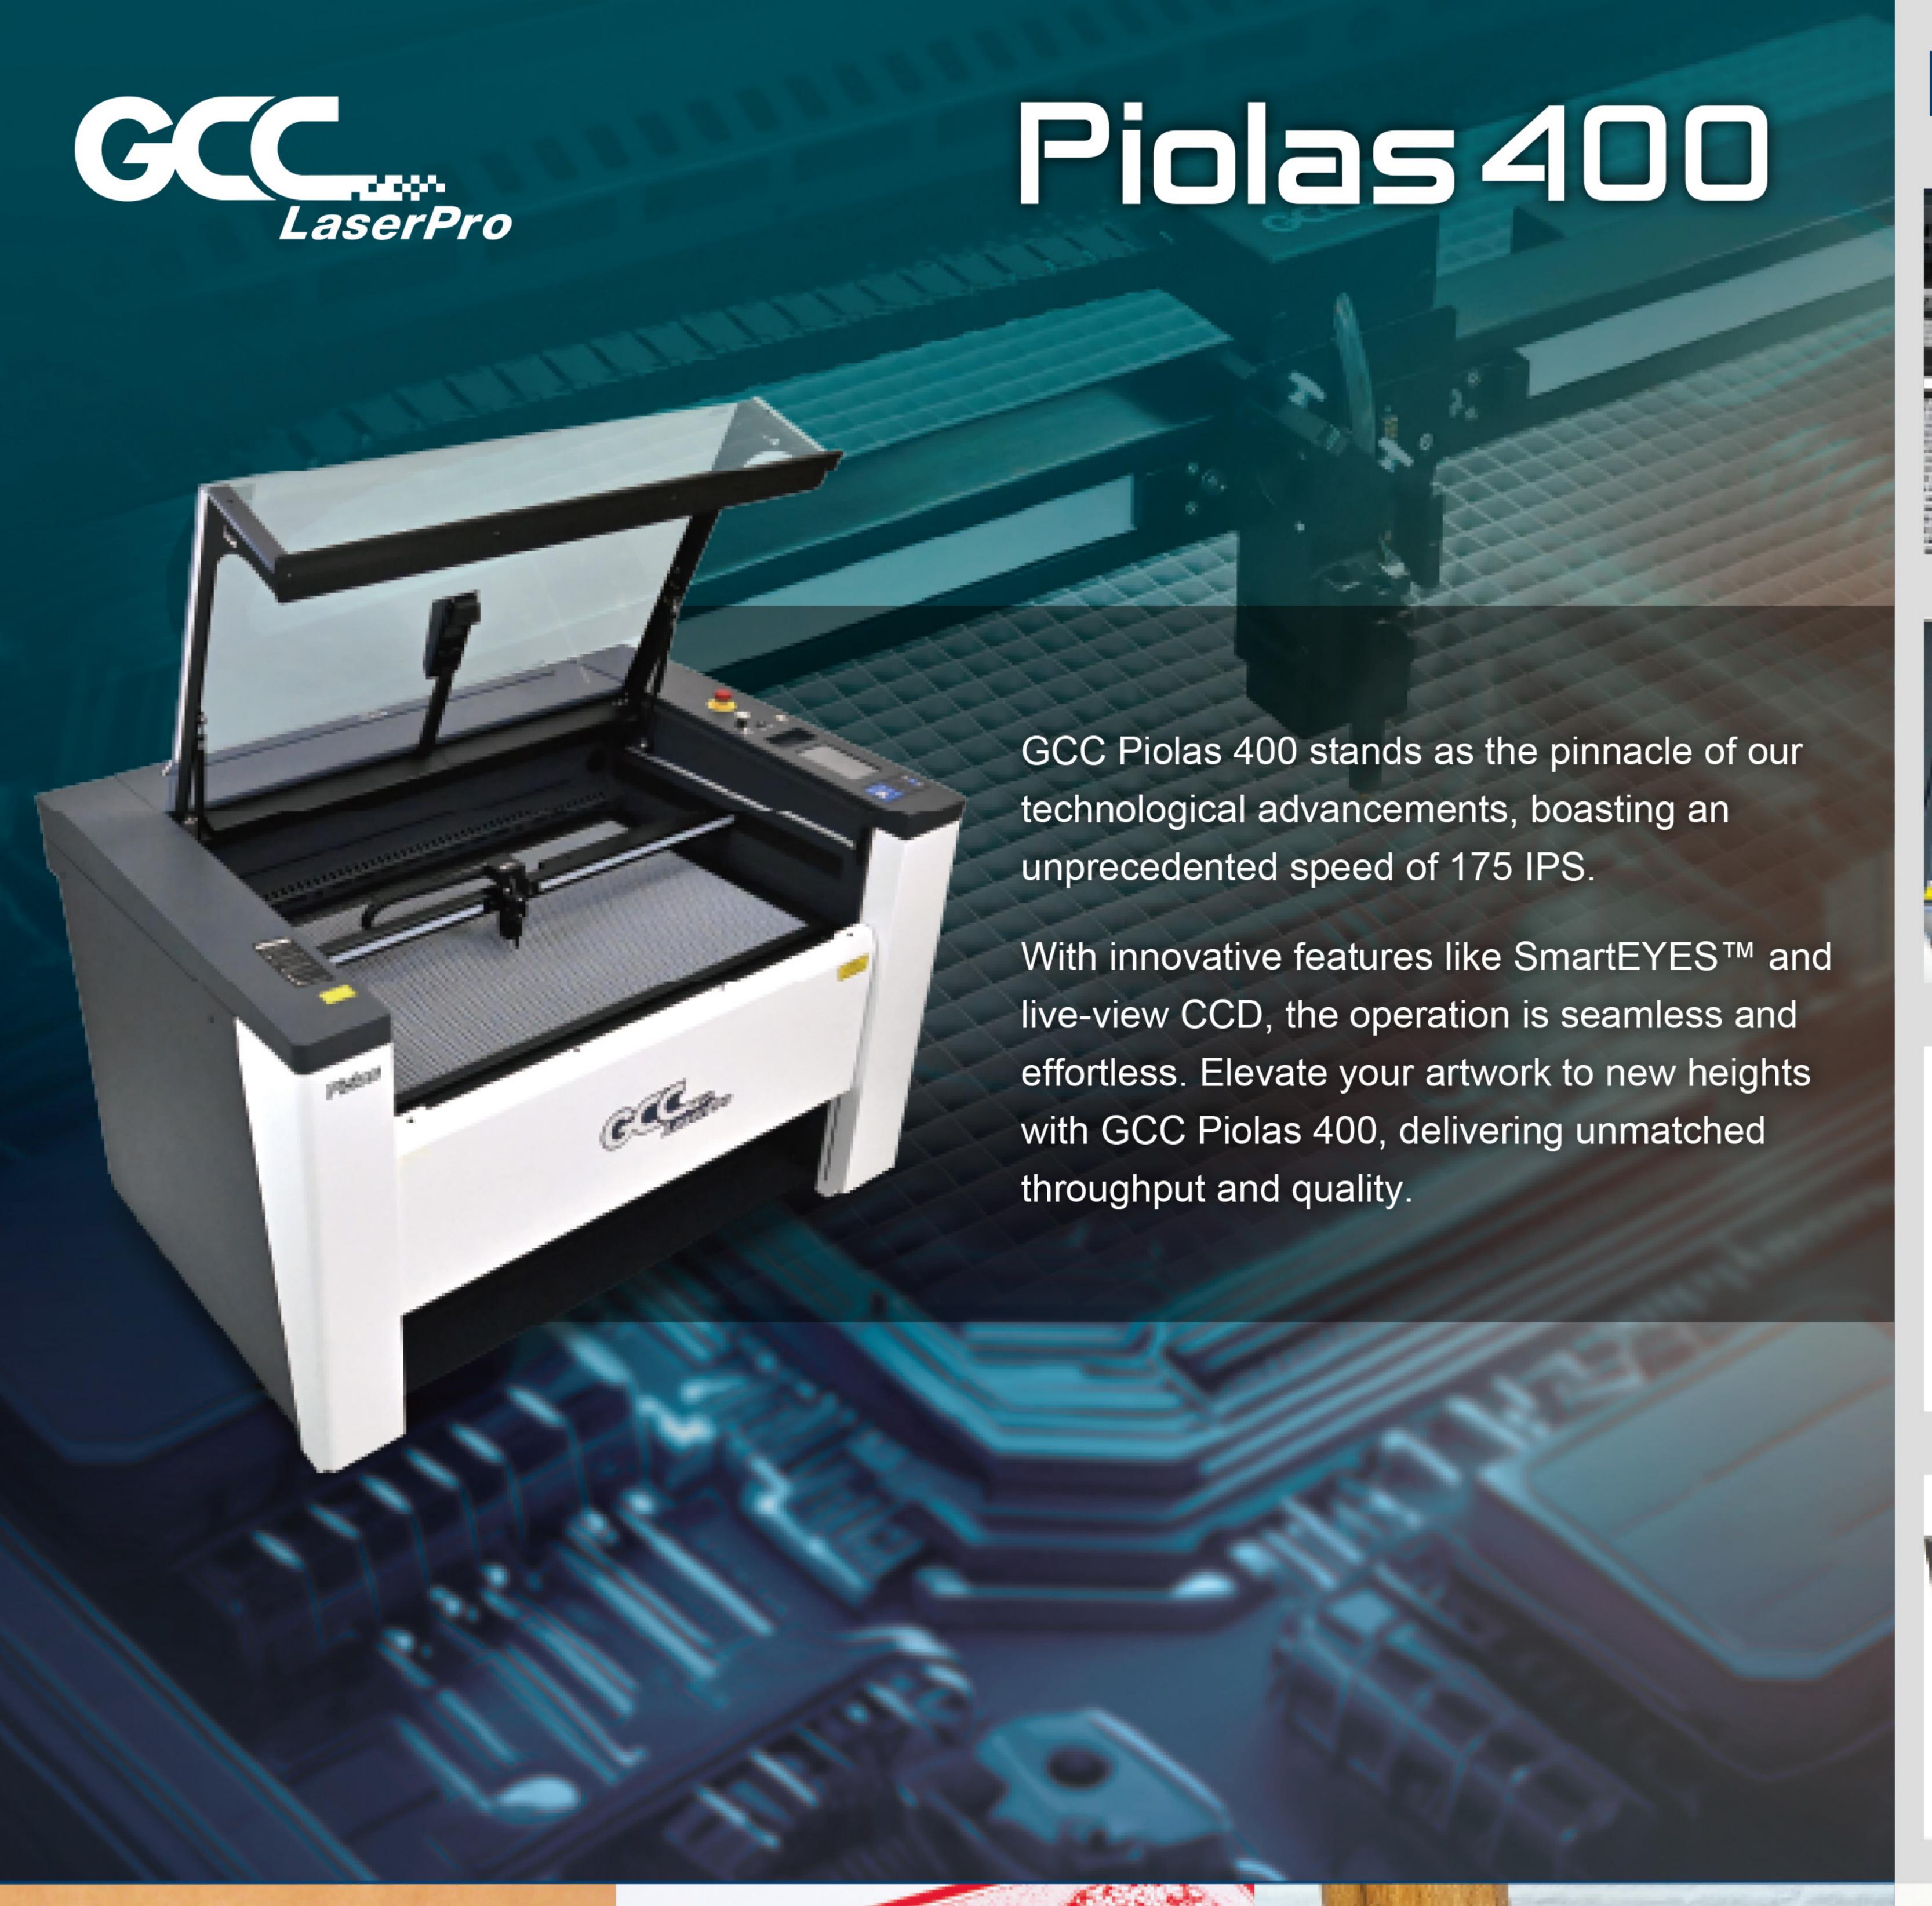

Features



175 IPS (4,445 mm/s) engraving speed

Piolas 400 excels in performance, delivering unparalleled productivity benefits.



SmartEYES™ CCD

SmartEYE™ CCD on the top lid, offering a comprehensive view of the entire work area for effortless positioning.



Transparent top-lid window

The clear and lightweight top-lid window allows expensive visibility and superior ease of use.



7" Touch Panel

Outfitted with a standard 7-inch touch panel and button controls for an intuitive and convenient operational experience.




Live-view camera

The standard live-view camera is an ideal educational tool for real-time observation and learning.




SmartLID™ for easy maintenance

An easy-access design simplifies maintenance.

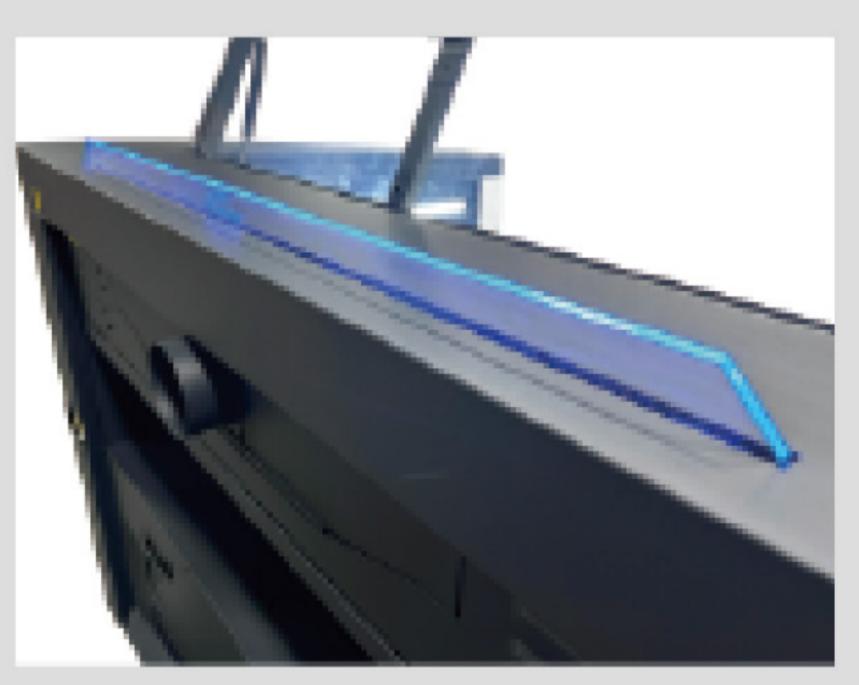

Status Indicator Light

The status indicator bar displays the machine's current operating state, standby mode, or error status, enabling users to easily monitor the machine's condition from a distance.

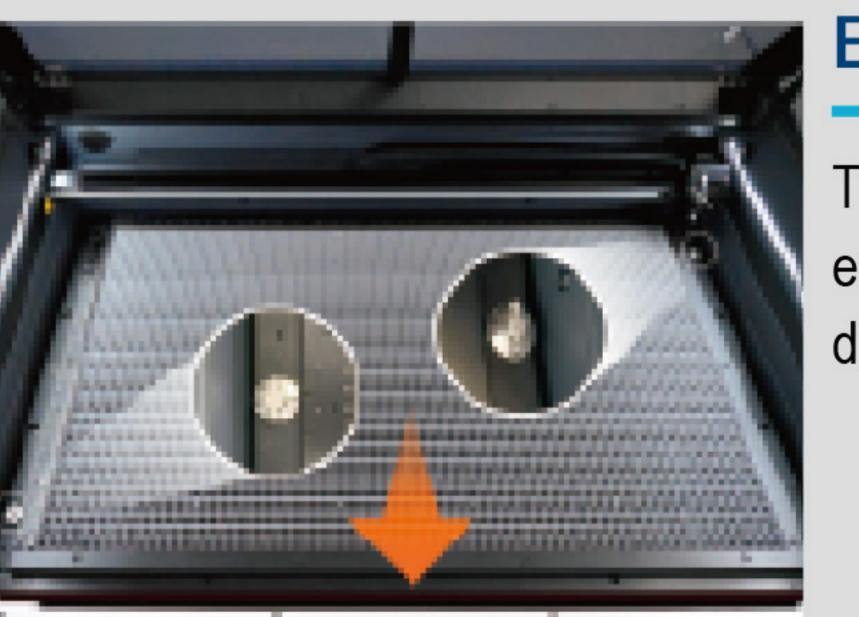

Easy Platform Switching

The unique rotary knob design enables easy switching between different cutting platforms.







